



Chair for Network Architectures and Services – Prof. Carle
Department for Computer Science
Technische Universität München

Master Course Computer Networks IN2097

**Prof. Dr.-Ing. Georg Carle
Christian Grothoff, Ph.D.
Dr. Nils Kammenhuber**

**Chair for Network Architectures and Services
Institut für Informatik
Technische Universität München
<http://www.net.in.tum.de>**



Technische Universität München



Chapter 4.5: Between Network Layer and Link Layer

MPLS: Multi-Protocol Label Switching

- ❑ Motivation + why to use MPLS
- ❑ How it works
 - Datagram format
 - Layer 2.5 switching
 - FECs, Labels, and LSPs
- ❑ What comes with it
 - LDP
 - CR-LDP
 - RSVP-TE
- ❑ GMPLS
- ❑ Why not to use MPLS
- ❑ Summary



MPLS

- Multi-Protocol Label Switching
- “Layer 2.5”:
 - Below IP (Layer 3), but above Link Layer (Layer 2)
 - Borrows a lot of information from IP Layer
 - Borrows a lot of concepts from ATM (Layer 2)
 - “A compromise/marriage between IP world and ATM world”
- Mixture of packet switching and circuit switching
 - Establish virtual circuits (LSPs) between endpoints
 - Send labelled packets along these LSPs
- Used by many, but not all, large ISPs



Why a new protocol? — Deficiencies of IP

- IP forwarding = longest prefix match on address = expensive
 - < 1K gateways to other ASes; >> 100K interdomain prefixes!
 - Longest prefix match in *every* router on path through our network!
- IP forwarding = destination-based
 - Not all paths possible, cf. exercise #8
 - Would be nicer for traffic engineering
- IP header is long complex
 - Destination, TTL [, QoS bits] at different byte/bit offsets
 - Expensive to parse in hardware
- Traffic of different VPN customers may disturb each other
 - Not visible to each other, but overloads on common links
- IP routing = slow: OSPF convergence 300ms to X seconds
 - Routing loops etc. during convergence → packet losses
 - Think of VoIP, videoconferencing, games, telesurgery, ...




Why should we use MPLS?

- Original motivation:
 - Switching is faster than routing
 - Build cheaper high-speed “routers” (which *switch* MPLS)
- Today’s motivation:
 - Separation of virtual circuits; MPLS-VPNs
 - Multiservice networks: not only IP
 - Arbitrary paths, better for traffic engineering
 - Fast reroute mechanisms (protection switching): 50ms
 - Better control over routing: More deterministic, more predictable, better for QoS service level agreements (SLAs)



MPLS ideas (1): Short and simple header

- Easy to parse in hardware

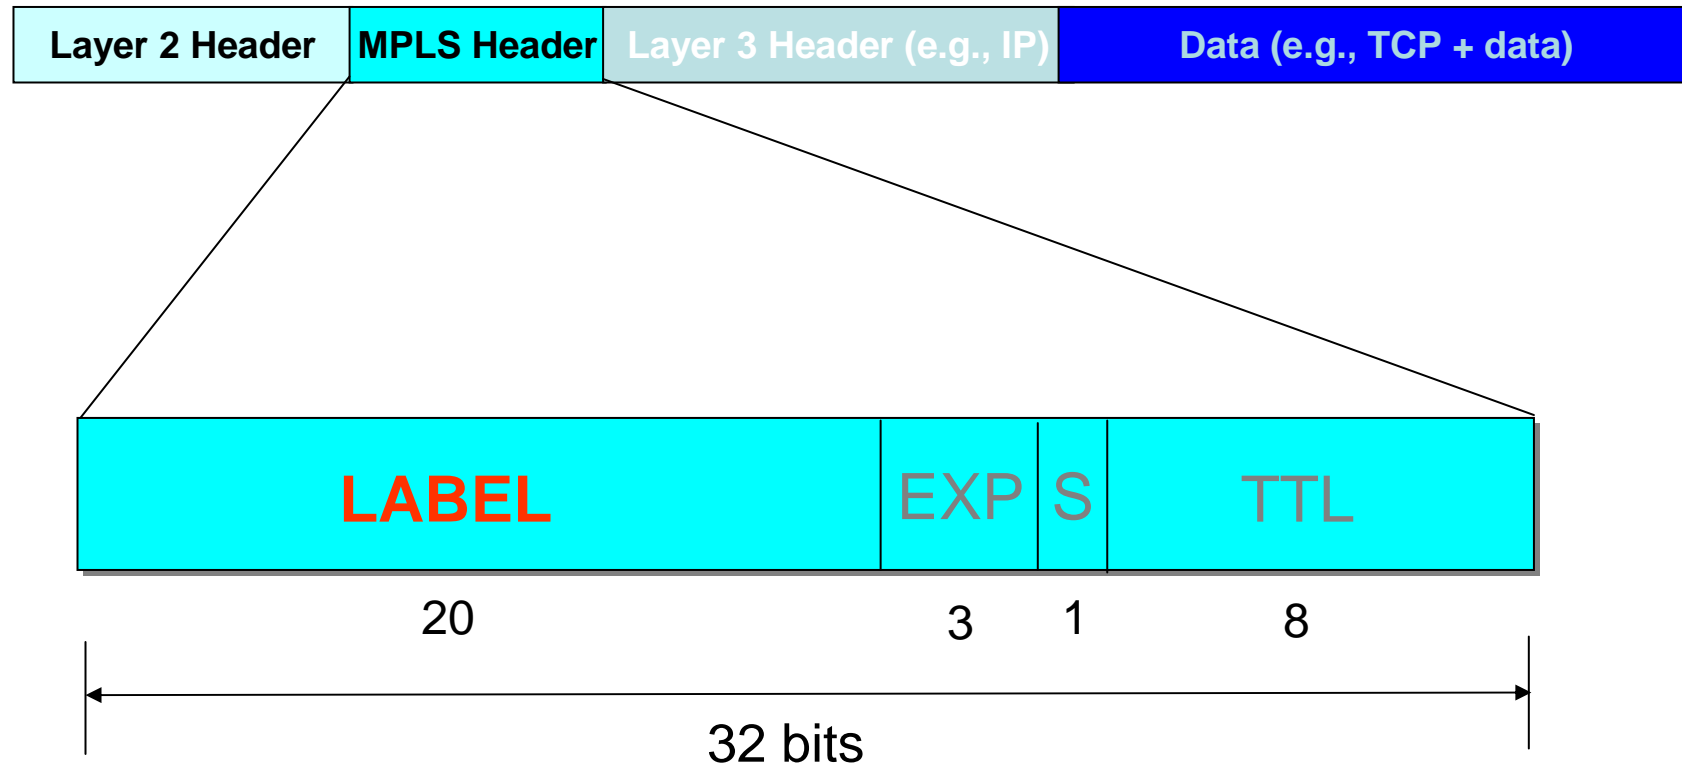




Basic Concepts and Terms

- Label Switching Routers (LSRs): Any router supporting MPLS
- Label
 - A fixed-length (20-bit) address
 - Label semantics are *local* to a router: One label \neq one path!
 - Labels may be swapped at each router
 - Labels may be stacked: “MPLS in MPLS”
- Label Switched Paths (LSPs)
 - An MPLS virtual circuit: Like a tunnel through the network
 - LSPs are unidirectional
- Forwarding Equivalence Classes (FECs):
All packets that are to be forwarded.....:
 - To the same next hop
 - Out the same interface
 - [With the same forwarding treatment (CoS)]




MPLS ideas (2a): Route at edge, switch in core

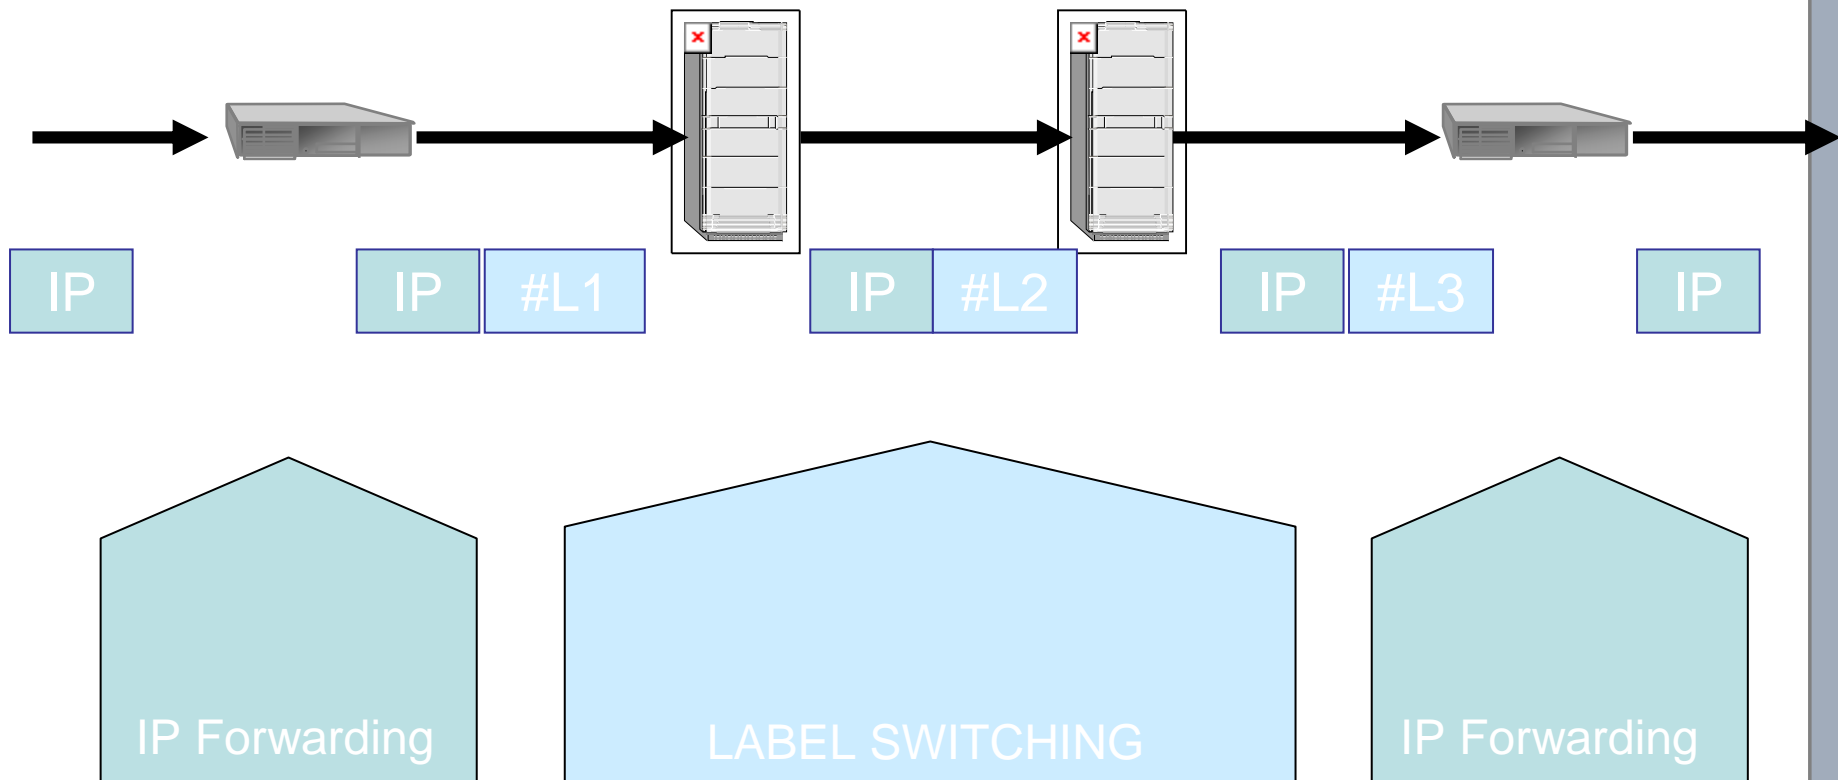




MPLS ideas (2b): Forwarding through the network

- IP packets: Labelled at ingress, label stripped at egress
- Within network: Forwarding by label, not by IP address!

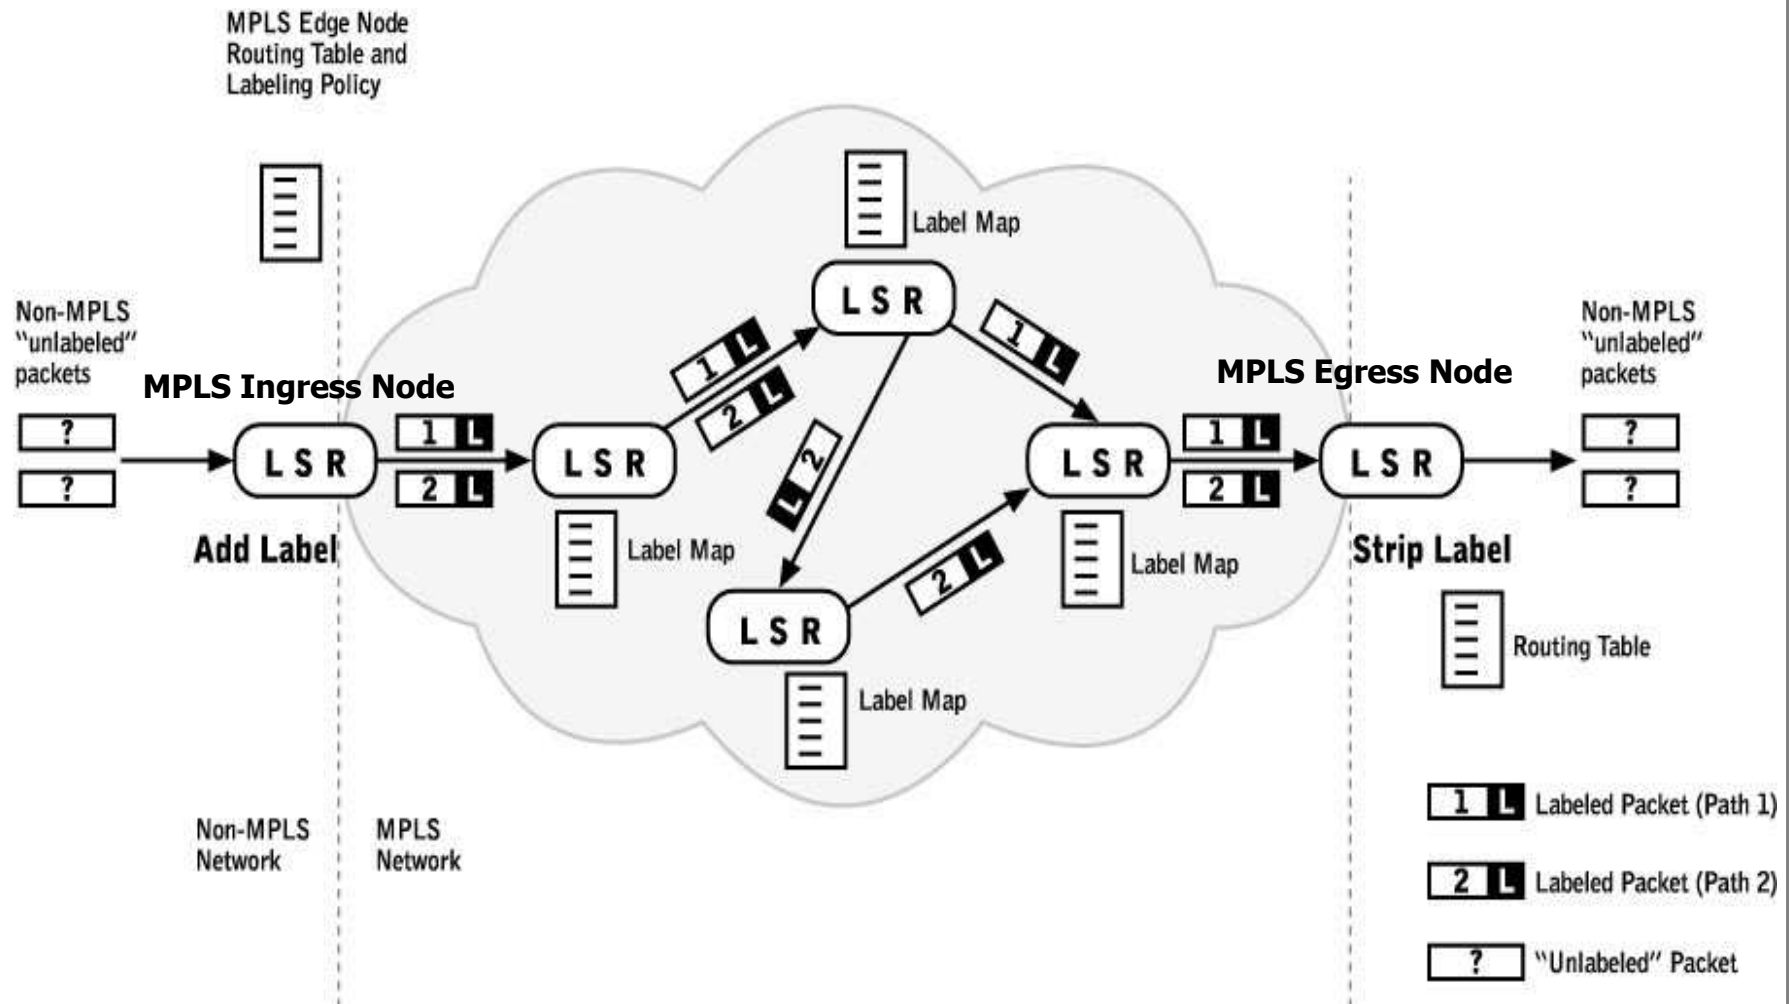



Basic Concepts and Terms

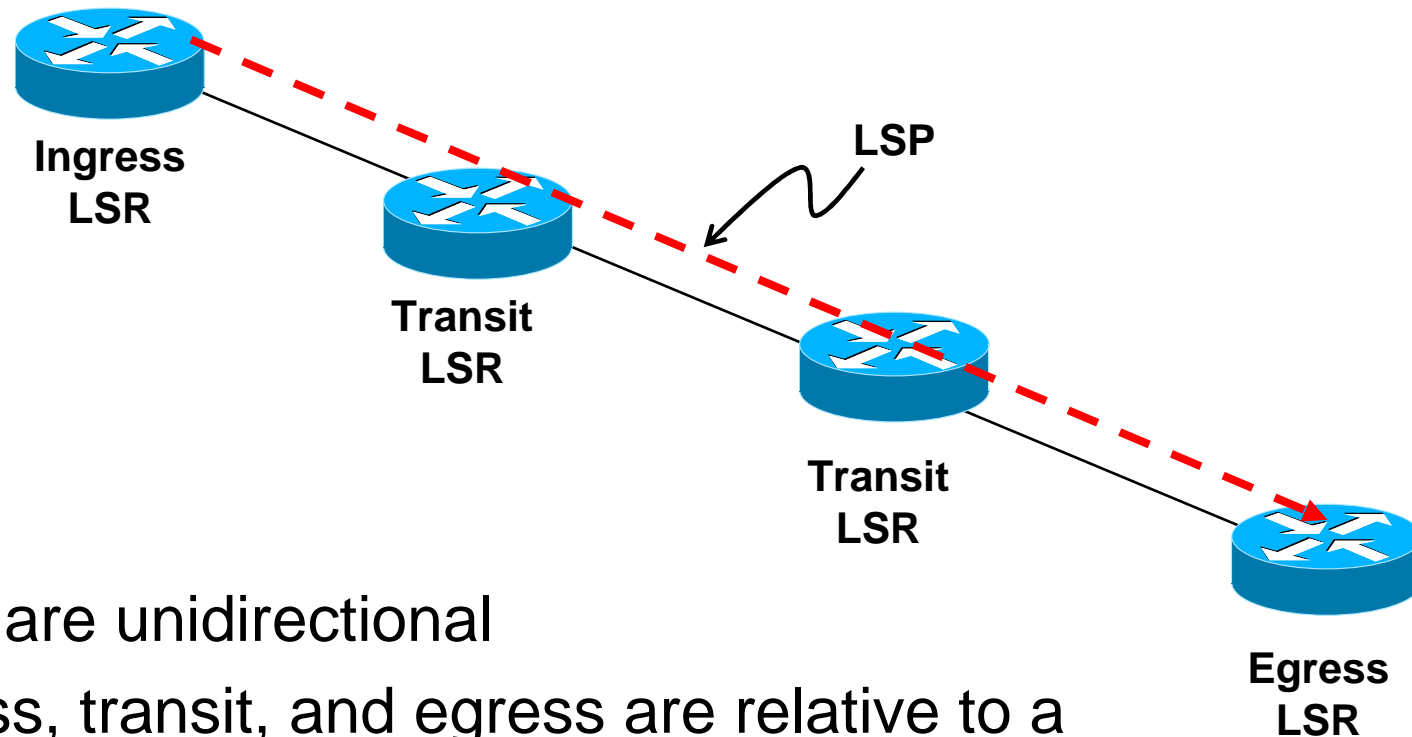


- ❑ LSPs are unidirectional
- ❑ Ingress, transit, and egress are relative to a given LSP
- ❑ A given router can be ingress, egress, and transit for different LSPs




Label Edge Routers

- Label Edge Router (LER)
 - A tunnel (LSP) endpoint
 - Ingress
 - Egress
 - Push and Pop

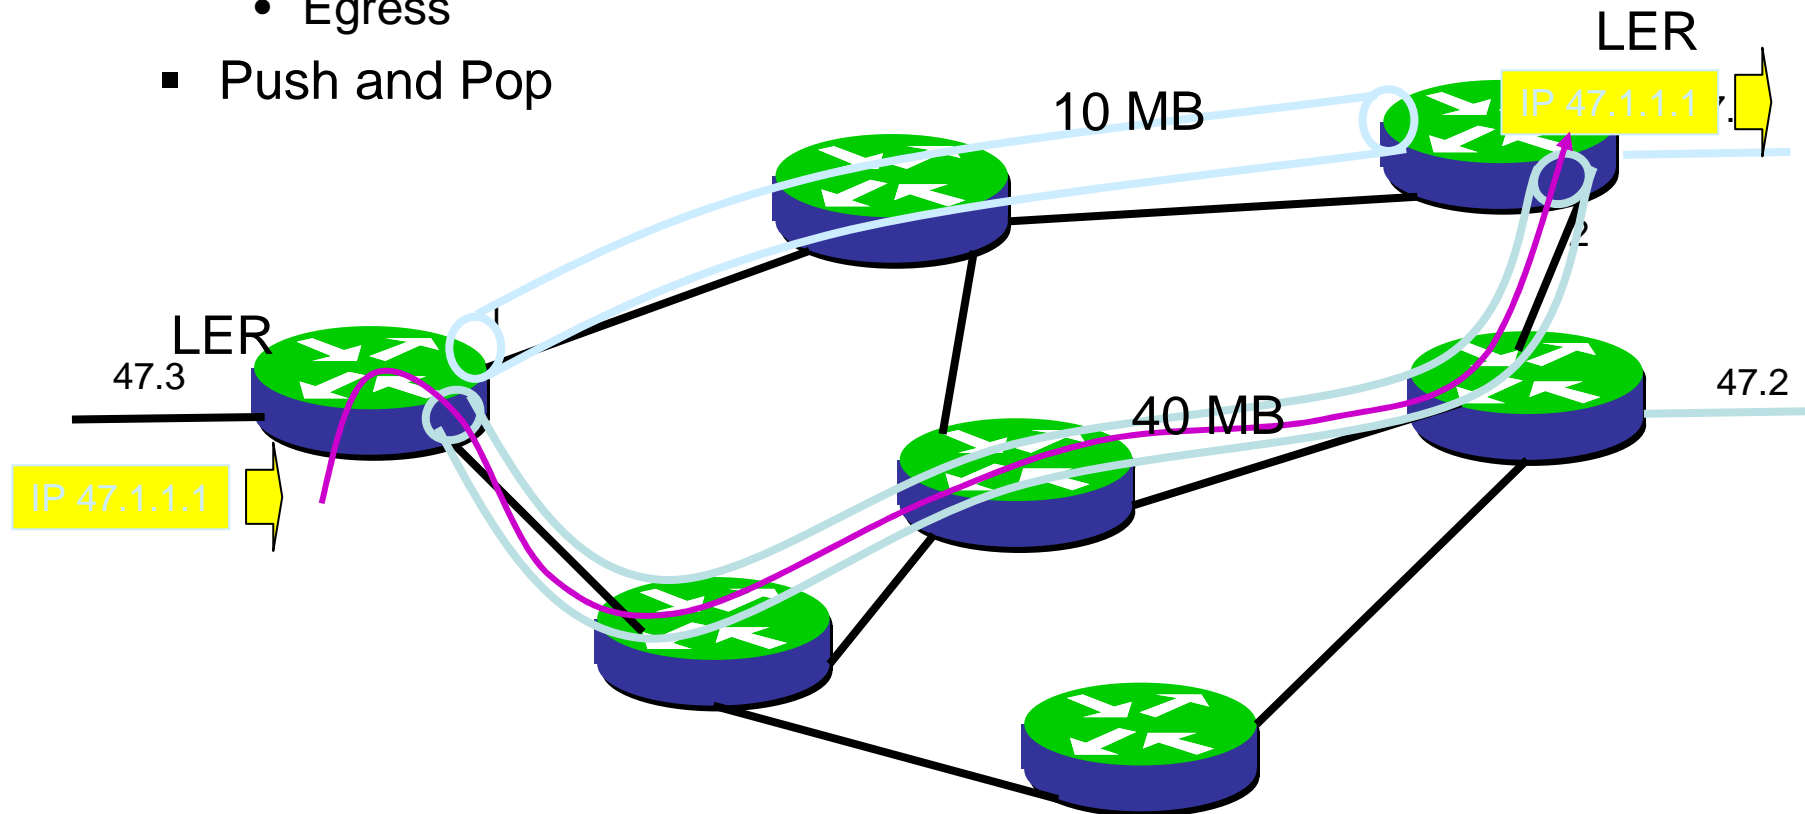



Forwarding Equivalence Classes

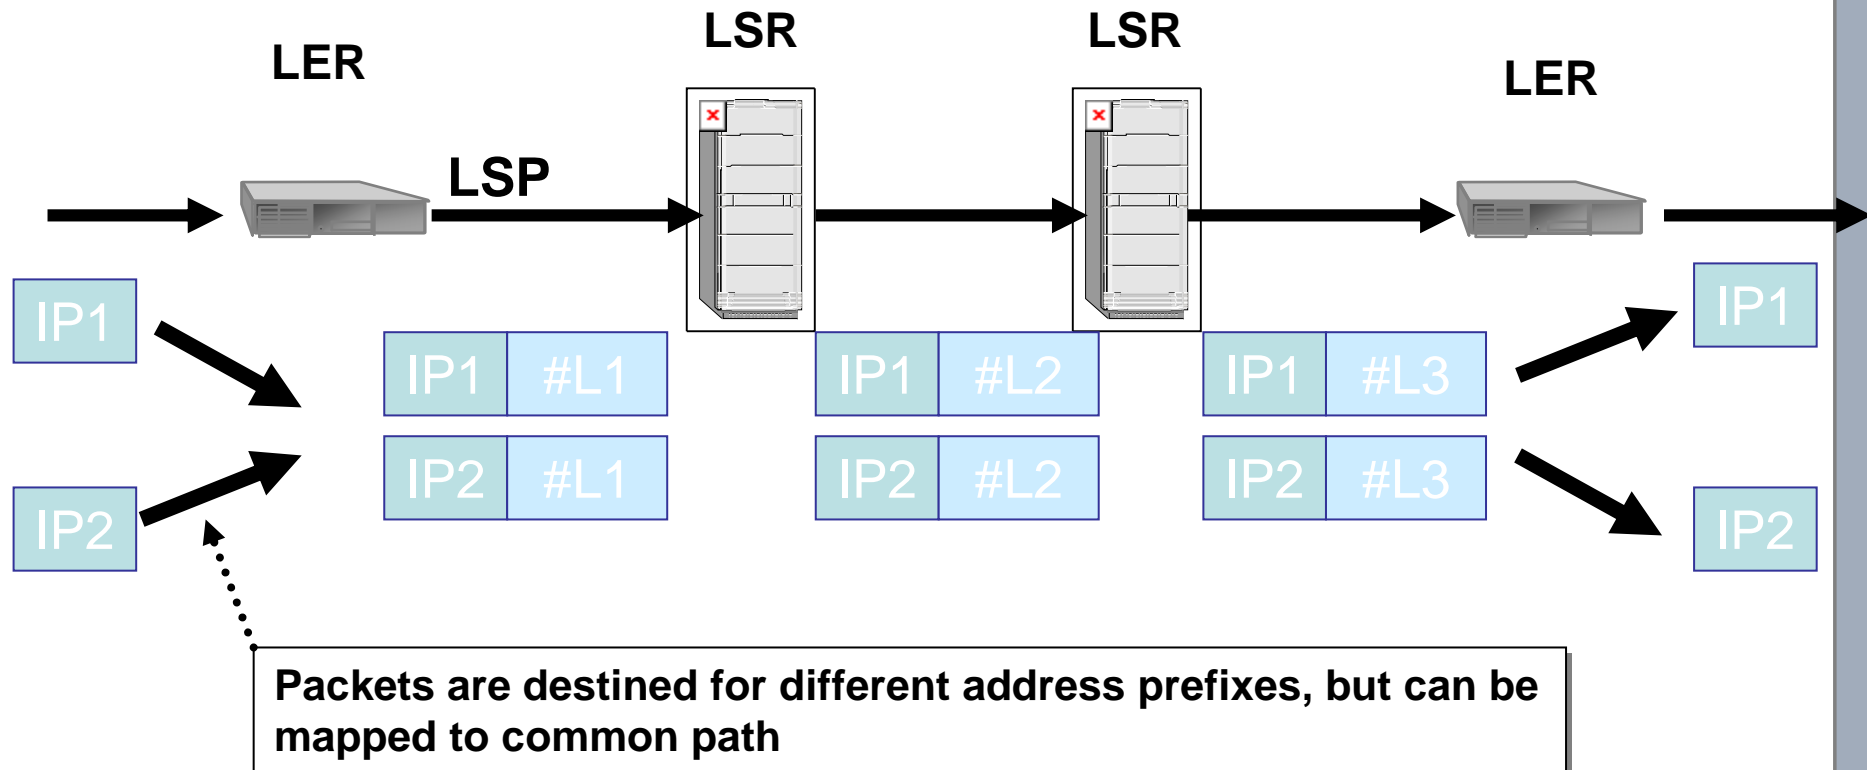


- FEC = “A subset of packets that are all treated the same way by a router”
- The concept of FECs provides for a great deal of flexibility and scalability
- In conventional routing, a packet is assigned to a FEC at each hop (i.e. L3 look-up), in MPLS it is only done once at the network ingress.



Penultimate Hop Popping


- ❑ Egress has to apply IP routing anyway
- ❑ → Can remove MPLS label one hop *before* egress

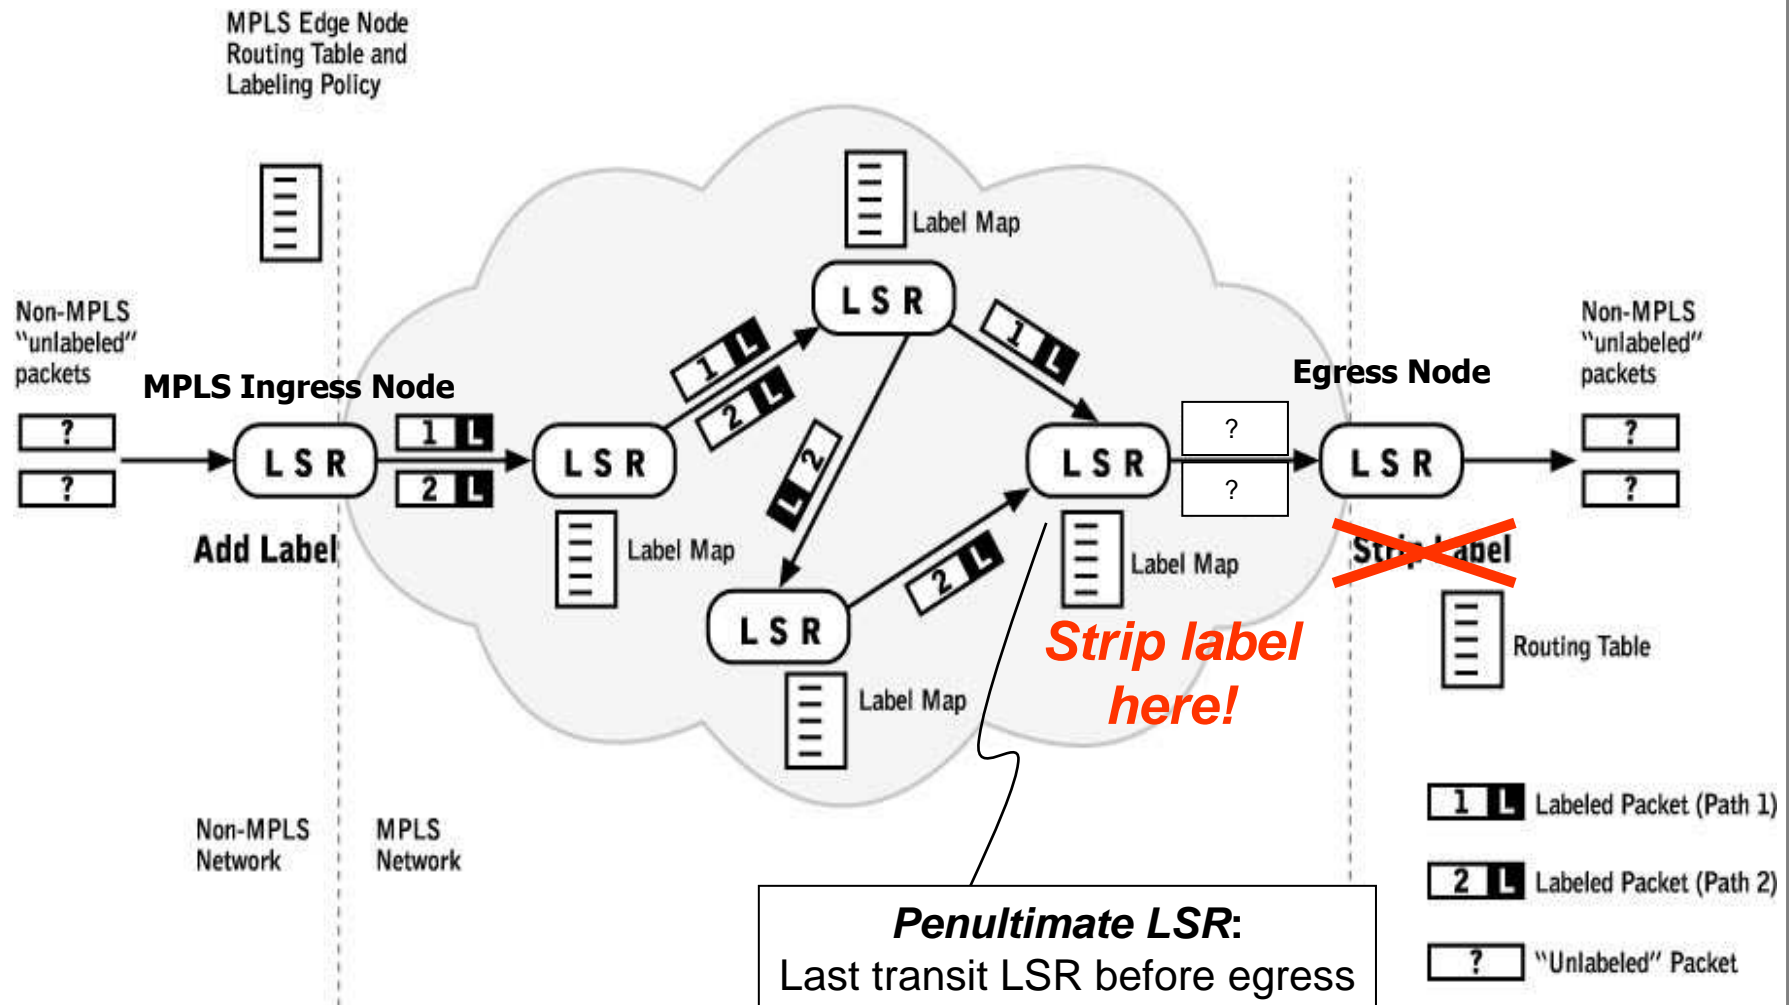



MPLS VPNs


- Virtual Private Networks: Make customers feel as if they have a direct and private connection

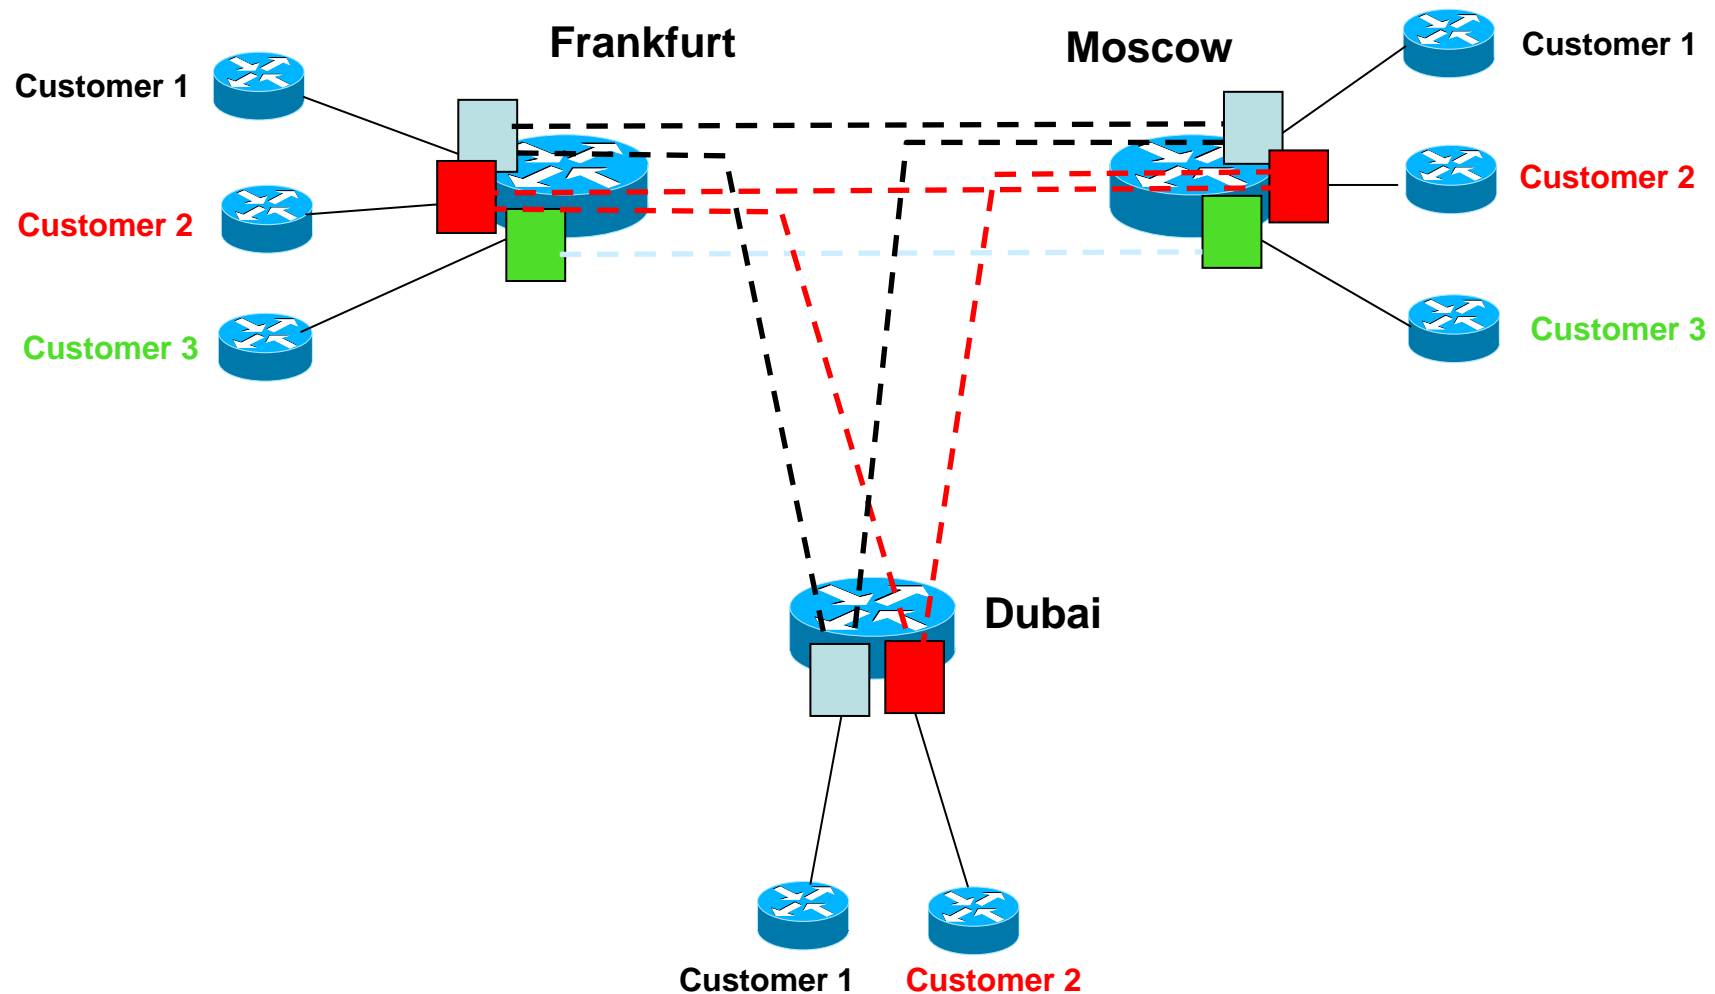



MPLS Fast Reroute (FRR)

- Configuration of backup paths in network
 - Many (local) backup paths for each primary LSR
- Upon detection of a failure
 - LSR immediately switches to its local backup path
 - No need to wait for signalling upstream! (in our example: R1)
- Very fast reaction speed: 50ms

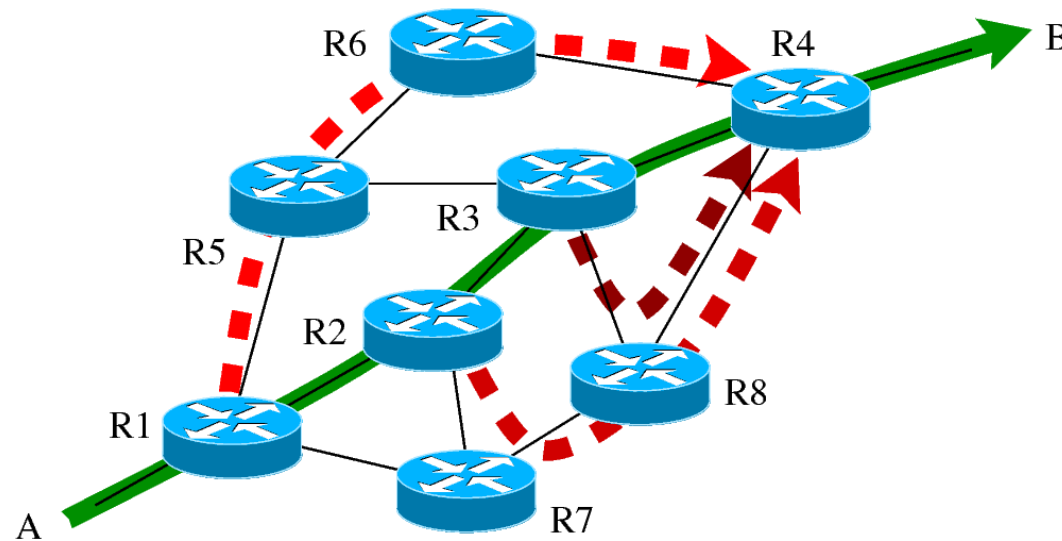



Configuring labels

- ❑ Labels: *local* to each router
- ❑ How do routers get to know labels and their semantics?
 - a) Manual configuration: does not scale
 - b) Signalling: Using some label distribution protocol
 - Set of procedures by which one LSR informs another LSRs of the bindings (label/FEC) it has made




Label Assignment and Distribution

- ❑ Decision to bind a particular label L to a particular FEC F
 - made by LSR which is downstream (with respect to that binding)
- ❑ Downstream LSR informs upstream LSR of the binding
- ❑ Direction
 - Labels are ‘downstream assigned’
 - Label bindings are distributed in ‘downstream to upstream’ direction.



Label Distribution

- Requests for labels flow *downstream*
 - From Ingress to Egress (like the MPLS packets)
 - Because ingress is the LSR that establishes the LSP
- Assignment of labels (label binding) flows *upstream*
 - From Egress to Ingress
 - Because LSRs need to map *incoming* labels to some action (Push, Swap, Pop)

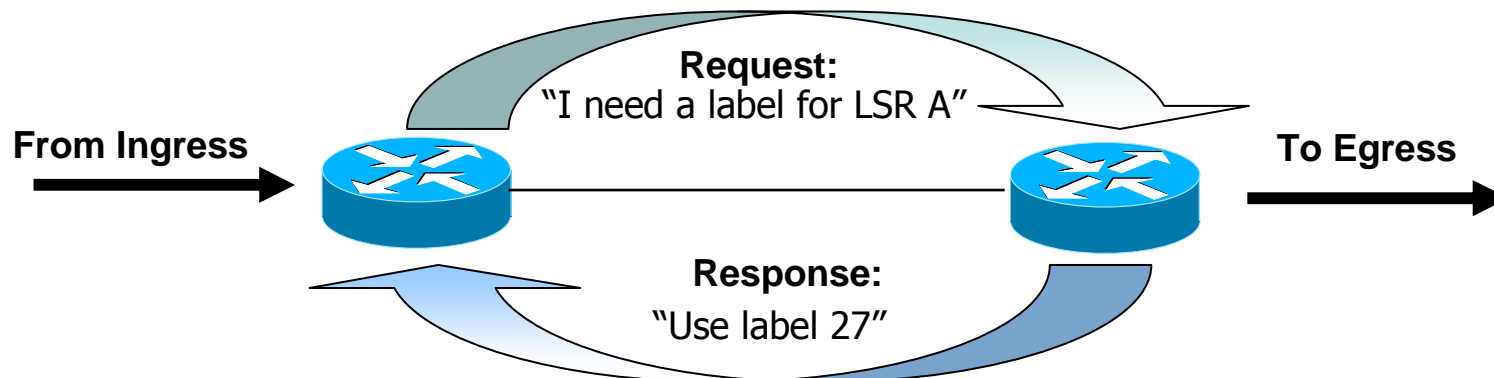



Label Distribution Protocols

- ❑ Label Distribution Protocol (LDP)
 - Hop-by-hop label distribution
 - Follows IGP best path: No traffic engineering capabilities
 - Highly scalable: Best suited for apps using thousands of LSPs (VPNs)
- ❑ Resource Reservation Protocol with Traffic Engineering Extensions (RSVP-TE)
 - End-to-end LSP signaling
 - Enables specification of path constraints
 - Less scalable, LSRs maintain soft state: Best suited for traffic engineering in the core



Label Distribution: RSVP

- ❑ End-to-end *constrained* path signaling
- ❑ Enabled by OSPF or IS-IS with TE extensions
 - Extended IGPs flood TE interface parameters, e.g.:
 - Maximum Reservable Bandwidth
 - Unreserved Bandwidth
 - ...
- ❑ Interface parameters used to build *Traffic Engineering Database* (TED)
- ❑ *Constrained Shortest Path First* (CSPF):
Calculates best path based on specified constraints




Label Distribution Protocols: Less used

- ❑ Constraint-Based Routed LDP (CR-LDP)
 - TE-capable LDP
 - Never widely deployed
- ❑ MP-BGP
 - Best suited for inter-AS VPNs
 - Inter-AS MPLS is a pain in the neck...



Generalized MPLS (GMPLS) for optical media

- Optical networks:
 - Switch fabric \approx mirrors that reflect light beams
 - One glass fibre, multiple wavelengths: $\lambda_1 \lambda_2 \dots \lambda_n$
 - Problem: Keep same wavelength λ_i through entire network!
- $\lambda_i =$ just another label to distribute! No new protocols required.

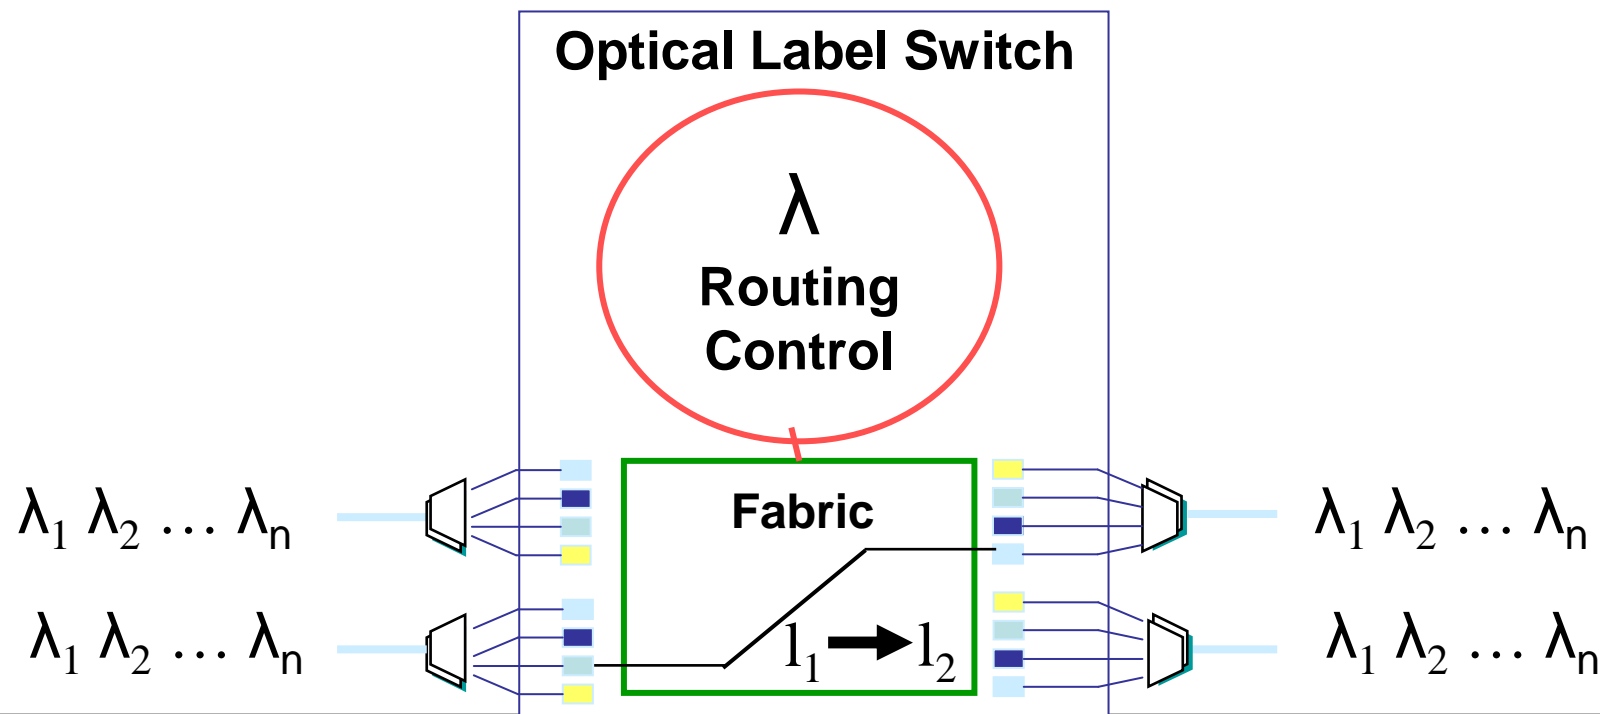



Why not to use MPLS

- Complexity
 - MPLS + some LDP = complex
 - Intradomain IP routing + MPLS + some LDP + intelligent Link Layer = very complex
- Higher complexity means...
 - Hard to debug
 - More administration overhead, and administrators are expensive
- Inter-AS MPLS only works in theory
 - Intradomain routing + Interdomain routing + MPLS + own LDP configuration + LDP configuration of peer ASes + intelligent Link Layer + intelligent Link Layers of other ASes = unmanageable



MPLS: Summary

- ❑ Sits between IP (L3) and Link Layer (L2)
- ❑ Switching instead of routing
- ❑ Arbitrary paths in network (LSPs)
- ❑ Setup of LSPs: Label distribution protocols
- ❑ GMPLS for optical networks



THANK YOU