

Chair for Network Architectures and Services – Prof. Carle  
Department for Computer Science  
TU München

**Master Course  
Computer Networks  
IN2097**

Prof. Dr.-Ing. Georg Carle  
Christian Grothoff, Ph.D.

Chair for Network Architectures and Services  
Institut für Informatik  
Technische Universität München  
<http://www.net.in.tum.de>

TUM  
Technische Universität München

Chair for Network Architectures and Services – Prof. Carle  
Department for Computer Science  
TU München

**SIP**

Credits in addition to  
Jim Kurose and Keith Ross:

Julie Chan, Vovida Networks.  
Milind Nimesh, Columbia University  
Christian Hoene, University of Tübingen

TUM  
Technische Universität München


**SIP: Session Initiation Protocol [RFC 3261]**

SIP long-term vision:  
all telephone calls, video conference calls take place over Internet

- people are identified by names or e-mail addresses, rather than by phone numbers
- you can reach callee, no matter where callee roams, no matter what IP device callee is currently using

SIP key person:  
Henning Schulzrinne, Columbia University

- M. Handley, H. Schulzrinne, and E. Schooler, "SIP: session initiation protocol," Internet Draft, Internet Engineering Task Force, March 1997. Work in progress.  
- H. Schulzrinne, A comprehensive multimedia control architecture for the Internet, 1997



IN2097 - Master Course Computer Networks, WS 2011/2012 3

**SIP**

- IETF RFC 2543: Session Initiation Protocol – An application layer signalling protocol that defines initiation, modification and termination of interactive, multimedia communication *sessions* between users.
- Sessions include
  - voice
  - video
  - chat
  - interactive games
  - virtual reality
- SIP is a text-based protocol, similar to HTTP and SMTP.

IN2097 - Master Course Computer Networks, WS 2011/2012 4

### SIP Services

- Setting up a call, SIP provides mechanism
  - for caller to let callee know she wants to establish a call
  - so caller, callee can agree on media type, encoding
  - to end call
- determine current IP address of callee:
  - maps mnemonic identifier to current IP address
- call management:
  - add new media streams during call
  - change encoding during call
  - invite others
  - transfer, hold calls

IN2097 - Master Course Computer Networks, WS 2011/2012 5

### Setting up a call to known IP address

□ Alice's SIP invite message indicates her port number, IP address, encoding she prefers to receive (e.g. AVP 0: PCM ulaw)

□ Bob's 200 OK message indicates his port number, IP address, preferred encoding (e.g. AVP 3: GSM)

□ SIP is an out-of-band signalling protocol

□ SIP messages can be sent over TCP or UDP. (All messages are ack'ed)

□ default SIP port number is 5060.

IN2097 - Master Course Computer Networks, WS 2011/2012 6

### Transport Protocol for SIP

- Arguments for using TCP as transport protocol for SIP
  - avoids possible problems in firewall traversal
  - avoids SIP overhead in case of packet loss
  - is efficient and provides congestion control for SIP traffic of significant volume between servers
- Arguments for using UDP as transport protocol for SIP
  - End systems may avoid the overhead in opening and closing a TCP connection for every call - as long as no packet loss occurs

IN2097 - Master Course Computer Networks, WS 2011/2012 7

### Setting up a call (more)

- codec negotiation:
  - suppose Bob doesn't have PCM  $\mu$ -law encoder.
  - Bob will instead reply with 606 Not Acceptable Reply, listing his encoders
  - Alice can then send new INVITE message, advertising different encoder
- rejecting a call
  - Bob can reject with replies "busy," "gone," "payment required," "forbidden"
- media can be sent over RTP or some other protocol

IN2097 - Master Course Computer Networks, WS 2011/2012 8

### Example of SIP message

```

INVITE sip:bob@domain.com SIP/2.0
Via: SIP/2.0/UDP 167.180.112.24
From: sip:alice@hereway.com
To: sip:bob@domain.com
Call-ID: a2e3a@pigeon.hereway.com
Content-Type: application/sdp
Content-Length: 885

c=IN IP4 167.180.112.24
m=audio 38060 RTP/AVP 0
  
```

- Here we don't know Bob's IP address.
- Intermediate SIP servers needed.
- Alice sends, receives SIP messages using SIP default port 5060
- Via: header specifies intermediate server(s)

Notes:

- HTTP message syntax
- sdp = session description protocol
- Call-ID is unique for every call.

IN2097 - Master Course Computer Networks, WS 2011/2012 9

### Name translation and user location

- caller wants to call callee, but only has callee's name or e-mail address.
- need to get IP address of callee's current host:
  - user moves around
  - DHCP protocol
  - user has different IP devices (PC, PDA, car device)
- result can be based on:
  - time of day (work, home)
  - caller (e.g. don't want boss to call you at home)
  - status of callee (calls sent to voicemail when callee is already talking to someone)

**Service provided by SIP servers:**

- SIP registrar server
- SIP proxy server

IN2097 - Master Course Computer Networks, WS 2011/2012 10

### SIP Registrar

- when Bob starts SIP client, client sends SIP REGISTER message to Bob's registrar server (similar function needed by Instant Messaging)
- registrar analogous to authoritative DNS server

**Register Message:**

```

REGISTER sip:domain.com SIP/2.0
Via: SIP/2.0/UDP 193.64.210.89
From: sip:bob@domain.com
To: sip:bob@domain.com
Expires: 3600
  
```

IN2097 - Master Course Computer Networks, WS 2011/2012 11

### SIP Proxy

- Alice sends invite message to her proxy server
  - contains address sip:bob@domain.com
- proxy responsible for routing SIP messages to callee
  - possibly through multiple proxies.
- callee sends response back through the same set of proxies.
- proxy returns SIP response message to Alice
  - contains Bob's IP address
- proxy analogous to local DNS server

IN2097 - Master Course Computer Networks, WS 2011/2012 12

### Example

Caller jim@umass.edu places a call to keith@upenn.edu

- Jim sends INVITE message to umass SIP proxy.
- Proxy forwards request to upenn registrar server.
- upenn server returns redirect response, indicating that it should try keith@eurecom.fr
- umass proxy sends INVITE to eurecom registrar.
- eurecom registrar forwards INVITE to 197.87.54.21, which is running keith's SIP client.
- 8) SIP response sent back
- 9) media sent directly between clients.

**Note:** SIP ack messages not shown.

IN2097 - Master Course Computer Networks, WS 2011/2012 13

### SIP consists of a few RFCs

RFC	Description
2376	The SIP INFO Method
3361	DHCP Option for SIP Servers
3310	HyperText Transfer Protocol (HTTP) Digest Authentication Using Authentication and Key Agreement (AKA)
3211	The Session Initiation Protocol UPDATE Method
3420	Internet Media Type message/sipfrag
3325	Private Extensions to the Session Initiation Protocol (SIP) for Asserted Identity within Trusted Networks
3323	A Privacy Mechanism for the Session Initiation Protocol (SIP)
3428	Session Initiation Protocol Extension for Instant Messaging
3326	The Reason Header Field for the Session Initiation Protocol (SIP)
3327	Session Initiation Protocol Extension for Registering Non-Adjacent Contacts
3329	Security Mechanism Agreement for the Session Initiation Protocol (SIP) Sessions
3313	Private Session Initiation Protocol (SIP) Extensions for Media Authorization
3486	Compressing the Session Initiation Protocol
3515	The Session Initiation Protocol (SIP) Refer Method
3319	Dynamic Host Configuration Protocol (DHCPv6) Options for Session Initiation Protocol (SIP) Servers
3581	An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing
3608	Session Initiation Protocol Extension Header Field for Service Route Discovery During Registration
3853	SMIME AES Requirement for SIP
3840	Indicating User Agent Capabilities in the Session Initiation Protocol (SIP)
3841	Caller Preferences for the Session Initiation Protocol (SIP)
3891	The Session Initiation Protocol (SIP) 'Replaces' Header
3892	The SIP Referred-By Mechanism
3893	SIP Authenticated Identity Body (AIB) Format
3903	An Event State Publication Extension to the Session Initiation Protocol (SIP)
3911	The Session Initiation Protocol (SIP) Join Header
3968	The Internet Assigned Number Authority (IANA) Header Field Parameter Registry for the Session Initiation Protocol (SIP)
3969	The Internet Assigned Number Authority (IANA) Universal Resource Identifier (URI) Parameter Registry for the Session Initiation Protocol (SIP)
4032	Update to the Session Initiation Protocol (SIP) Preconditions Framework
4028	Session Times in the Session Initiation Protocol (SIP)
4092	Usage of the Session Description Protocol (SDP) Alternative Network Address Types (ANAT) Semantics in the Session Initiation Protocol (SIP)
4168	The Stream Control Transmission Protocol (SCTP) as a Transport for the Session Initiation Protocol (SIP)
4244	An Extension to the Session Initiation Protocol (SIP) for Request History Information
4320	Actions Addressing Identified Issues with the Session Initiation Protocol's (SIP) non-INVITE Transaction
4321	Problems Identified associated with the Session Initiation Protocol's (SIP) non-INVITE Transaction
4412	Communications Resource Priority for the Session Initiation Protocol (SIP)
4488	Suppression of Session Initiation Protocol (SIP) REFER Method Implicit Subscription
4508	Conveying Feature Tags with Session Initiation Protocol (SIP) REFER Method
4483	A Mechanism for Content Indirection in Session Initiation Protocol (SIP) Messages
4485	Guidelines for Authors of Extensions to the Session Initiation Protocol (SIP)

IN2097 - Master Course Computer Networks, WS 2011/2012 14

### SIP Architecture

IN2097 - Master Course Computer Networks, WS 2011/2012 15

### User Agents, Proxy Server, Registrar Server

- **User Agent:** An application that initiates, receives and terminates calls.
  - User Agent Clients (UAC) – An entity that initiates a call.
  - User Agent Server (UAS) – An entity that receives a call.
  - Both UAC and UAS can terminate a call.
- **Proxy Server:** An intermediary program that acts as both a server and a client to make requests on behalf of other clients.
  - Requests are serviced internally or passed on, possibly after translation, to other servers.
  - Interprets, rewrites or translates a request message before forwarding it.
- **Registrar Server:** A server that accepts REGISTER requests.
  - The registrar server may support authentication.
  - A registrar server is typically co-located with a proxy or redirect server and may offer location services

IN2097 - Master Course Computer Networks, WS 2011/2012 16

### Redirect Server

- ❑ A server that accepts a SIP request, maps the address into zero or more new addresses and returns these addresses to the client.
- ❑ Unlike proxy server, the redirect server does not initiate own SIP requests
- ❑ Unlike a user agent server, the redirect server does not accept or terminate calls.
- ❑ The redirect server generates 3xx responses to requests it receives, directing the client to contact an alternate set of URIs.
- ❑ In some architectures it may be desirable to **reduce the processing load on proxy servers** that are responsible for routing requests, and improve signaling path robustness, by relying on redirection.
- ❑ **Redirection allows servers to push routing information for a request back to the client**, thereby taking themselves out of the loop of further messaging while still aiding in locating the target of the request.
  - When the originator of the request receives the redirection, it will send a new request based on the URI(s) it has received.
  - By propagating URIs from the core of the network to its edges, redirection allows for considerable network scalability.
- ❑ C.f. iterative (non-recursive) DNS queries

IN2097 - Master Course Computer Networks, WS 2011/2012 17

### Location Server

- ❑ A location server is used by a SIP redirect or proxy server to obtain information about a called party' s possible location(s).
- ❑ A location Server is a logical IP server that transmits a Presence Information Data Format - Location Object (PIDF-LO).
- ❑ A PIDF-LO is an XML Scheme for carrying geographic location of a target.
- ❑ As stated in RFC 3693, location often must be kept private. The Location Object (PIDF-LO) contains rules which provides guidance to the Location Recipient and controls onward distribution and retention of the location.

IN2097 - Master Course Computer Networks, WS 2011/2012 18

### SIP Messages – Methods and Responses

**SIP components communicate by exchanging SIP messages:**

<p><u>SIP Methods:</u></p> <ul style="list-style-type: none"> <li>▪ INVITE – Initiates a call by inviting user to participate in session.</li> <li>▪ ACK - Confirms that the client has received a final response to an INVITE request.</li> <li>▪ BYE - Indicates termination of the call.</li> <li>▪ CANCEL - Cancels a pending request.</li> <li>▪ REGISTER – Registers the user agent.</li> <li>▪ OPTIONS – Used to query the capabilities of a server.</li> <li>▪ INFO – Used to carry out-of-band information, such as DTMF (Dual-tone multi-frequency) digits.</li> </ul>	<p><u>SIP Responses:</u></p> <ul style="list-style-type: none"> <li>▪ 1xx - Informational Messages.</li> <li>▪ 2xx - Successful Responses.</li> <li>▪ 3xx - Redirection Responses.</li> <li>▪ 4xx - Request Failure Responses.</li> <li>▪ 5xx - Server Failure Responses.</li> <li>▪ 6xx - Global Failures Responses.</li> </ul>
--	--

IN2097 - Master Course Computer Networks, WS 2011/2012 19

### SIP Headers

- ❑ SIP borrows much of the syntax and semantics from HTTP.
- ❑ A SIP messages looks like an HTTP message: message formatting, header and MIME support.
- ❑ An example SIP header:

```

-----
                                SIP Header
-----
INVITE sip:5120@192.168.36.180 SIP/2.0
Via: SIP/2.0/UDP 192.168.6.21:5060
From: sip:5121@192.168.6.21
To: <sip:5120@192.168.36.180>
Call-ID: c2943000-e0563-2a1ce-2e323931@192.168.6.21
CSeq: 100 INVITE
Expires: 180
User-Agent: Cisco IP Phone/ Rev. 1/ SIP enabled
Accept: application/sdp
Contact: sip:5121@192.168.6.21:5060
Content-Type: application/sdp

```

IN2097 - Master Course Computer Networks, WS 2011/2012 20

### SIP Addressing

- The SIP address is identified by a SIP URL, in the format: user@host.
- Examples of SIP URLs:
  - sip:user@domain.com
  - sip:user@192.168.10.1
  - sip:14083831088@domain.com

IN2097 - Master Course Computer Networks, WS 2011/2012 21

### Registration

- Each time a user turns on the SIP user client (SIP IP Phone, PC, or other SIP device), the client registers with the proxy/registration server.
- Registration can also occur when the SIP user client needs to inform the proxy/registration server of its location.
- The registration information is periodically refreshed and each user client must re-register with the proxy/registration server.
- Typically the proxy/registration server will forward this information to be saved in the location/redirect server.

SIP Messages:  
 REGISTER – Registers the address listed in the To header field.  
 200 – OK.

IN2097 - Master Course Computer Networks, WS 2011/2012 22

### Simplified SIP Call Setup and Teardown

The diagram illustrates the SIP call setup and teardown process across three phases:


- Call Setup:**
  - User Agent 1 sends INVITE to Proxy Server 1.
  - Proxy Server 1 forwards INVITE to Location/Redirect Server.
  - Location/Redirect Server returns 302 (Moved Temporarily) to Proxy Server 1.
  - Proxy Server 1 returns ACK to User Agent 1.
  - Proxy Server 1 forwards INVITE to Proxy Server 2.
  - Proxy Server 2 returns 302 (Moved Temporarily) to Proxy Server 1.
  - Proxy Server 1 returns ACK to User Agent 1.
  - Proxy Server 1 forwards INVITE to User Agent 2.
  - User Agent 2 returns 180 (Ringling) to Proxy Server 1.
  - Proxy Server 1 returns 200 (OK) to User Agent 1.
  - User Agent 1 returns ACK to Proxy Server 1.
- Media Path:**
  - RTP MEDIA PATH is established between User Agent 1 and User Agent 2.
- Call Teardown:**
  - User Agent 1 sends BYE to Proxy Server 1.
  - Proxy Server 1 forwards BYE to Location/Redirect Server.
  - Location/Redirect Server returns BYE to Proxy Server 1.
  - Proxy Server 1 returns 200 (OK) to User Agent 1.
  - Proxy Server 1 forwards BYE to Proxy Server 2.
  - Proxy Server 2 returns BYE to Proxy Server 1.
  - Proxy Server 1 returns 200 (OK) to User Agent 1.
  - Proxy Server 1 forwards BYE to User Agent 2.
  - User Agent 2 returns BYE to Proxy Server 1.
  - Proxy Server 1 returns 200 (OK) to User Agent 1.

IN2097 - Master Course Computer Networks, WS 2011/2012 23

### SIP – Design Framework


- SIP was designed for:
  - Integration with existing IETF protocols.
  - Scalability and simplicity.
  - Mobility.
  - Easy feature and service creation.

IN2097 - Master Course Computer Networks, WS 2011/2012 24

 **Integration with IETF Protocols**


- Other IETF protocol standards can be used to build a SIP based application. SIP works with existing IETF protocols, for example:
  - RTP Real Time Protocol - to transport real time data and provide QOS feedback.
  - SDP Session Description Protocol – for describing multimedia sessions.
  - RSVP - to reserve network resources.
  - RTSP Real Time Streaming Protocol - for controlling delivery of streaming media.
  - SAP Session Advertisement Protocol - for advertising multimedia session via multicast.
  - MIME – Multipurpose Internet Mail Extension – describing content on the Internet.
  - COPS – Common Open Policy Service.
  - OSP – Open Settlement Protocol.

IN2097 - Master Course Computer Networks, WS 2011/2012 25

 **Scalability and Simplicity**


- Scalability:  
The SIP architecture is scalable, flexible and distributed.
  - Functionality such as proxying, redirection, location, or registration can reside in different physical servers.
  - Distributed functionality allows new processes to be added without affecting other components.
- Simplicity:  
SIP is designed to be:
  - “Fast and simple in the core.”
  - “Smarter with less volume at the edge.”
  - Text based for easy implementation and debugging.

IN2097 - Master Course Computer Networks, WS 2011/2012 26

 **Feature Creation**


- SIP can support these features and applications:
  - Basic call features (call waiting, call forwarding, call blocking etc.)
  - Unified messaging (the integration of different streams of communication - e-mail, SMS, Fax, voice, video, etc. - into a single unified message store, accessible from a variety of different devices.)
  - Call forking
  - Click to talk
  - Presence
  - Instant messaging
  - Find me / Follow me

IN2097 - Master Course Computer Networks, WS 2011/2012 27

 **Feature Creation (2)**


- A SIP based system can support rapid feature and service creation
- For example, features and services can be created using:
  - Common Gateway Interface (CGI).
    - A standard for interfacing external applications with information servers, such as Web servers (or SIP servers).  
A CGI program is executed in real-time, so that it can output dynamic information.
  - Call Processing Language (CPL).
    - Jonathan Lennox, Xiaotao Wu, Henning Schulzrinne: RFC 3880
    - Designed to be implementable on either network servers or user agents. Meant to be simple, extensible, easily edited by graphical clients, and independent of operating system or signalling protocol. Suitable for running on a server where users may not be allowed to execute arbitrary programs, as it has no variables, loops, or ability to run external programs.
    - Syntactically, CPL scripts are represented by XML documents.

IN2097 - Master Course Computer Networks, WS 2011/2012 28

 **References**


- For more information on SIP:
  - IETF: <http://www.ietf.org/html.charters/sip-charter.html>
- Henning Schulzrinne's SIP page
  - <http://www.cs.columbia.edu/~hgs/sip/>

IN2097 - Master Course Computer Networks, WS 2011/2012 29


 Chair for Network Architectures and Services – Prof. Carle  
Department for Computer Science  
TU München

**Location Information and  
IETF GeoPriv Working Group**

credits:  
Milind Nimesh, Columbia University


 Technische Universität München

IN2097 - Master Course Computer Networks, WS 2011/2012 30

 **Location Information**

- Describes physical position of a person or device:
  - geographical
  - civic (i.e., address)
  - descriptive (e.g. library, airport)
- Formatting and transfer of location information – relatively easy
- Privacy and security – complex
- Application:
  - emergency services
  - resource management
  - social networking
  - search
  - navigation


IN2097 - Master Course Computer Networks, WS 2011/2012 31

 **IETF Geopriv Working Group**

- Geographic Location/Privacy working group
- Primary tasks for this working group
  - assess authorization, integrity and privacy requirements
  - select standardized location information format
    - enhance format
      - availability of security & privacy methods
  - authorization of: requester, responders, proxies
- Goal: transferring location information: private + secure


IN2097 - Master Course Computer Networks, WS 2011/2012 32





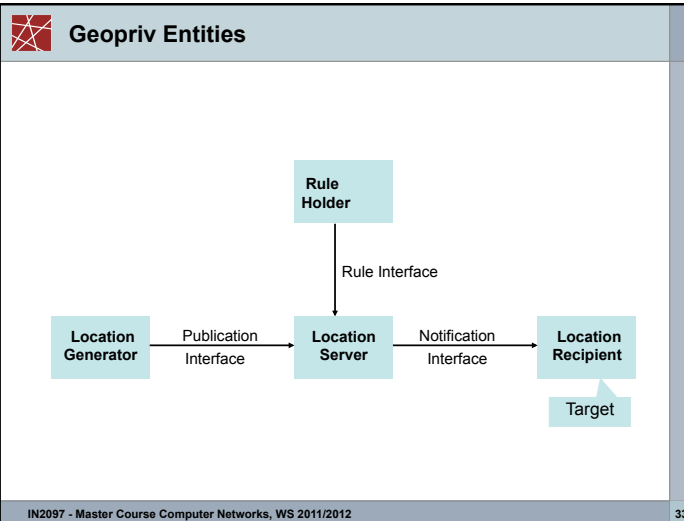

- ### Geopriv Terminology
- Location Object: conveys location information + privacy rules
  - Rule Maker: creates rules → governs access to location information
  - Target: person/entity whose location communicated
  - Using Protocol: protocol carrying location object
  - Viewer: consumes location information but does not pass information further
  
  - c.f. RFC 3693
- IN2097 - Master Course Computer Networks, WS 2011/2012 34

- ### Geopriv Requirements
- Secure transmission of location objects
  - User controlled privacy rules
  - Filtering location information
  - Location object carries core set of privacy rules
  - Ability of user to hide real identity
- IN2097 - Master Course Computer Networks, WS 2011/2012 35

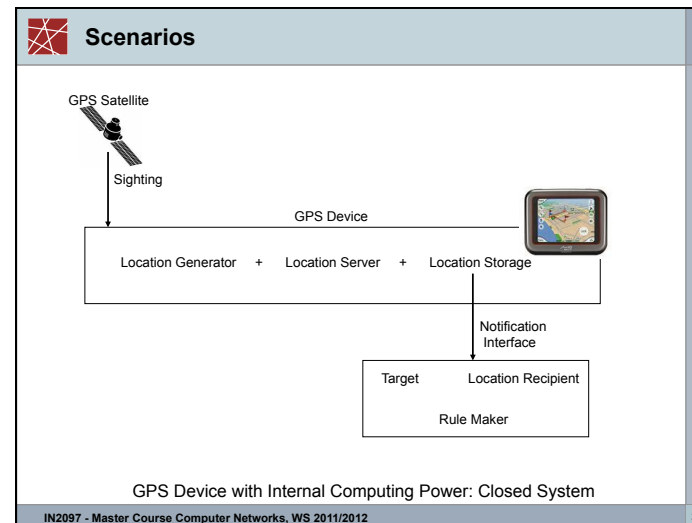

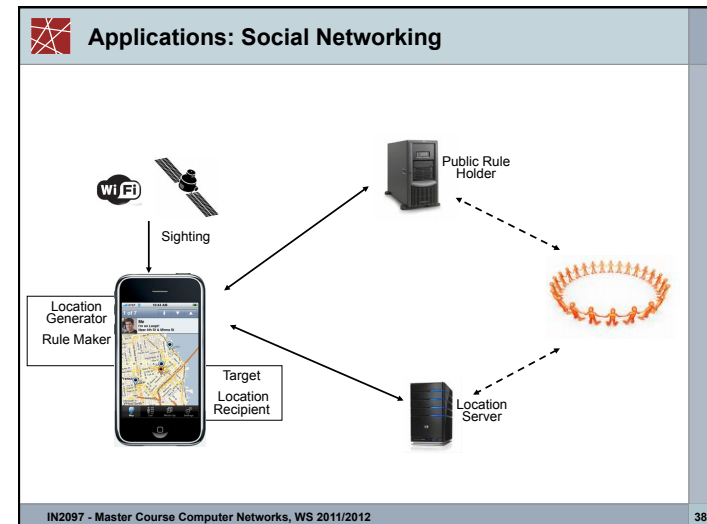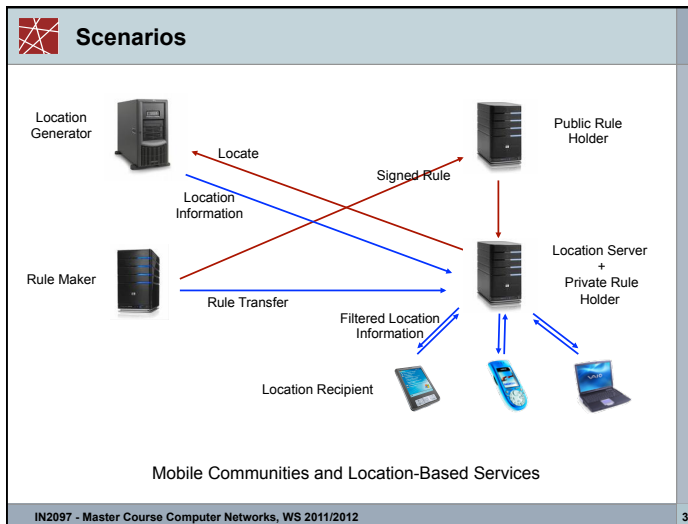

- ### Location Configuration
- Configuring the location of a device, using means such as:
- DHCP extensions
    - RFC3825 : Option 123, geo-coordinate based location
    - RFC4776 : Option 99, civic address
  - Link Layer Discovery Protocol - Media Endpoint Discovery
    - LLDP - a vendor-neutral Layer 2 protocol that allows a network device to advertise its identity and capabilities on the local network. IEEE standard 802.1AB-2005 in May 2005. Supersedes proprietary protocols like Cisco Discovery Protocol.
    - auto-discovery of LAN information (system id, port id, VLAN id, DiffServ settings, ...) ⇒ plug & play
    - cisco discovery protocol: switch broadcasts switch/port id
      - switch → floor, port → room ⇒ room level accuracy
  - HTTP Enabled Location Delivery
    - device retrieves location from Location Information Server (LIS)
    - assumption: device & LIS present in same admin domain; find LIS by DHCP, IPv6 anycast, ...
  - Applications ⇒ emergency 911, VoIP, location based applications
- IN2097 - Master Course Computer Networks, WS 2011/2012 39

- ### Security Considerations
- Traffic Analysis
    - attacks on target and privacy violations
  - Securing the Privacy Rules
    - rules accessible to LS
    - authenticated using signature
  - Emergency Case
    - handling authentication failure
  - Identities & Anonymity
- IN2097 - Master Course Computer Networks, WS 2011/2012 40

### Presence Information Data Format - PIDF

- ❑ XML based object format to communicate presence information
  - ⇒ Instant Messaging (IM)
- ❑ PIDF extension to carry geographical information:
- ❑ Extended PIDF encapsulates
  - preexisting location information formats
  - security & policy control
- ❑ Protocols capable of carrying XML or MIME types suitable
- ❑ Security: MIME-level → S/MIME

41

### PIDF Elements

Baseline: RFC 3863	Extensions: RFC 4119
<ul style="list-style-type: none"> <li>❑ entity</li> <li>❑ contact (how to contact the person)</li> <li>❑ timestamp</li> <li>❑ status</li> <li>❑ tuple (provide a way of segmenting presence information)</li> </ul>	<ul style="list-style-type: none"> <li>❑ location-info</li> <li>❑ usage-rules               <ul style="list-style-type: none"> <li>▪ retransmission-allowed</li> <li>▪ retention-expires</li> <li>▪ ruleset-reference</li> <li>▪ note-well</li> </ul> </li> <li>❑ method</li> <li>❑ provided-by</li> </ul>

42

### Location Type Registry

```

graph LR
    Office["Office (9am – 6pm)"] --> Cinema["Cinema (7pm – 9pm)"]
    Cinema --> Home["Home (9pm – 8am)"]
  
```

Office (9am – 6pm): call divert: off, email: office pc, jabber status: office

Cinema (7pm – 9pm): call divert: on, email: blackberry, jabber status: busy

Home (9pm – 8am): call divert: off, email: home pc, jabber status: home


- ❑ Describes places of humans or end systems
- ❑ Application
  - define location-based actions
  - e.g. if loc = “classroom” then cell phone ringer = off
  - e.g. if loc = “cinema” then call divert = on
- ❑ Location coordinate knowledge ≠ context
- ❑ airport, arena, bank, bar, bus-station, club, hospital, library...
- ⇒ Prediction: most communication will be presence-initiated or pre-scheduled


43


### GeoPriv RFCs

- ❑ RFC 3693: Geopriv Requirements, 2004 (Informational), Updated by RFC 6280
- ❑ RFC 3694: Threat Analysis of the Geopriv Protocol, 2004 (Informational), Updated by RFC 6280
- ❑ RFC 3825: Dynamic Host Configuration Protocol Option for Coordinate-based Location Configuration Information, 2004 (Proposed Standard), Obsoleted by RFC 6225
- ❑ RFC 4079: A Presence Architecture for the Distribution of GEOPRIV Location Objects, 2005 (Informational)
- ❑ RFC 4119: A Presence-based GEOPRIV Location Object Format, 2005 (Proposed Standard), Updated by RFC 5139, RFC 5491
- ❑ RFC 4589: Location Types Registry, 2006 (Proposed Standard)
- ❑ RFC 4676: Dynamic Host Configuration Protocol (DHCPv4 and DHCPv6) Option for Civic Addresses Configuration Information, 2006 (Proposed Standard), Obsoleted by RFC 4776
- ❑ RFC 4745, Common Policy: A Document Format for Expressing Privacy Preferences, 2007 (Proposed Standard)
- ❑ RFC 4776: Dynamic Host Configuration Protocol (DHCPv4 and DHCPv6) Option for Civic Addresses Configuration Information, 2006 (Proposed Standard), Updated by RFC 5774

44

 <b>GeoPriv RFCs</b>	
<ul style="list-style-type: none"> <li>❑ RFC 5139: Revised Civic Location Format for Presence Information Data Format Location Object (PIDF-LO), 2008 (Proposed Standard)</li> <li>❑ RFC 5491: GEOPRIV Presence Information Data Format Location Object (PIDF-LO) Usage Clarification, Considerations, and Recommendations 2009 (Proposed Standard)</li> <li>❑ RFC 5580: Carrying Location Objects in RADIUS and Diameter, 2009 (Proposed Standard)</li> <li>❑ RFC 5606: Implications of 'retransmission-allowed' for SIP Location Conveyance, 2009 (Informational)</li> <li>❑ RFC 5687: GEOPRIV Layer 7 Location Configuration Protocol: Problem Statement and Requirements, 2010 (Informational)</li> <li>❑ RFC 5774: Considerations for Civic Addresses in the Presence Information Data Format Location Object (PIDF-LO): Guidelines and IANA Registry Definition, 2010 (Best Current Practice)</li> <li>❑ RFC 5808: Requirements for a Location-by-Reference Mechanism, 2010 (Informational)</li> </ul>	45
<small>IN2097 - Master Course Computer Networks, WS 2011/2012</small>	

 <b>GeoPriv RFCs</b>	
<ul style="list-style-type: none"> <li>❑ RFC 5870: A Uniform Resource Identifier for Geographic Locations ('geo' URI), 2010 (Proposed Standard)</li> <li>❑ RFC 5985: HTTP-Enabled Location Delivery (HELD), 2010 (Proposed Standard)</li> <li>❑ RFC 5986: Discovering the Local Location Information Server (LIS), 2010 (Proposed Standard)</li> <li>❑ RFC 6155: Use of Device Identity in HTTP-Enabled Location Delivery (HELD), 2011 (Proposed Standard)</li> <li>❑ RFC 6225: Dynamic Host Configuration Protocol Options for Coordinate-Based Location Configuration Information, 2011 (Proposed Standard)</li> <li>❑ RFC 6280: An Architecture for Location and Location Privacy in Internet Applications, 2011 (Best Current Practice)</li> </ul>	46
<small>IN2097 - Master Course Computer Networks, WS 2011/2012</small>	

 <b>GeoPriv Tools</b>	
<p>c.f. <a href="http://trac.tools.ietf.org/wg/geopriv/trac/wiki/GeoprivTools">http://trac.tools.ietf.org/wg/geopriv/trac/wiki/GeoprivTools</a></p> <ul style="list-style-type: none"> <li>❑ Open Source LIS: A PHP-based HELD server with a Java-based client, <a href="http://held-location.sourceforge.net/">http://held-location.sourceforge.net/</a></li> <li>❑ The Internet Geolocation Toolkit: A multi-platform, multi-protocol C++ library for geolocation access, <a href="http://igtk.sourceforge.net/">http://igtk.sourceforge.net/</a></li> <li>❑ ECRItdroid: An emergency calling client for Android. Doesn't do GEOPRIV now (just LoST/ECRIT), but should soon, in order to be fully ECRIT-compliant, <a href="http://ecritdroid.googlecode.com/">http://ecritdroid.googlecode.com/</a></li> <li>❑ Online DHCP encoders: An AJAX tool for encoding location values for use in the DHCP location options; <a href="http://geopriv.dreamhosters.com/dhcloc/">http://geopriv.dreamhosters.com/dhcloc/</a></li> <li>❑ Firefox implementation of W3C Geolocation API: supports a limited profile of HELD. To enable: Go to "about:config"; set "geo.wifi.protocol" to "1"; set "geo.wifi.uri" to URL of HELD server, <a href="https://bugzilla.mozilla.org/show_bug.cgi?id=545001">https://bugzilla.mozilla.org/show_bug.cgi?id=545001</a></li> <li>❑ CommScope LIS: commercial LIS, <a href="http://www.commscope.com">http://www.commscope.com</a></li> </ul>	47
<small>IN2097 - Master Course Computer Networks, WS 2011/2012</small>	